

Technical outdoor 1044206283



1044/218/3/5/IP67/PFC/O=/C.BOX/M20-14
/MK/LAMP/BAG

Outdoor lighting fixtures are applicable for a wide range of different areas, e.g. workshops, engine rooms, stores, passage ways etc. They are designed to meet maritime requirements.



Termination	
Blind-plug	M20-Polyamide
Number of cable entries	2
Number of blind plugs	2
Cable gland	M20-Polyamide
Ready for mounting	VG04
Light source	
Lamp power (W)	18
Lamp base	G13
Number of lamps	2
Light source	T8
Technical data	
Maximum ambient temperature (°C)	45
IP classification	67
Minimum ambient temperature (°C)	-20
Ballast	
Number of ballast	1
Type of Ballast	High power factor correction

Electrical data	
Voltage from (V)	230
Maximum voltage (V)	230
Minimum frequency (Hz)	50
Maximum frequency (Hz)	50
Dimensions	
Height (mm)	109
Width (mm)	193
Length (mm)	692
Gross weight (kg)	5,14
Body	
Colour of body	White
Body material	Zinc coated steel
Body colour code	RAL 9016
Optic	
Optic	Clear
Material of diffuser	Polycarbonate
Remarks	
Remarks	VC22 Connection box O=2xM20x1.5 plastic D7-14mm

Technical outdoor
1044206283





1044/218/3/5/IP67/PFC/O=/C.BOX/M20-14
 /MK/LAMP/BAG

Outdoor lighting fixtures are applicable for a wide range of different areas, e.g. workshops, engine rooms, stores, passage ways etc. They are designed to meet maritime requirements.



Drawings

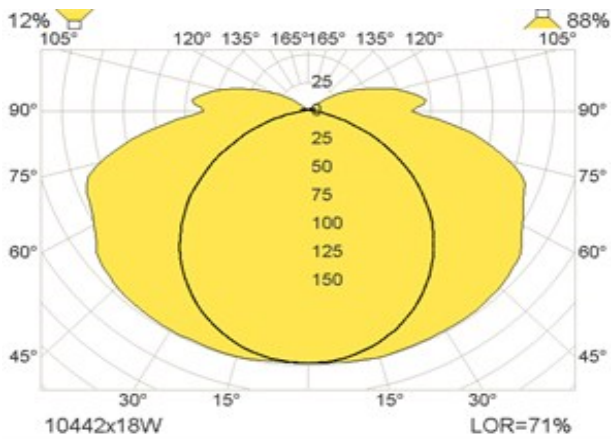

Technical outdoor
1044206283



1044/218/3/5/IP67/PFC/O=/C.BOX/M20-14
 /MK/LAMP/BAG

Outdoor lighting fixtures are applicable for a wide range of different areas, e.g. workshops, engine rooms, stores, passage ways etc. They are designed to meet maritime requirements.



Drawings

