

ACR-RELEJ AUTOMATSKOG PUNJENJA

-Kada osjeti punjenje(alternator,punjač) spaja baterije u paralelu.Kada punjenje nestane razdvaja baterije kako bi sačuvao startnu bateriju. Zaštita- IP65

Tehnički detalji:


Nominalni napon	12V DC 24V DC
Izolacija kod starta	DA
Potrošnja u radu	90mA (Paralela) 15mA (Odvajanje)
Stalna struja	65A
Kratkotrajna struja	115A (5 min)
Presjek vodiča	16 mm ²
Max presjek vodiča	150mm ²
Max Torz. učvršćenja	6.78 Nm
Dimenzije	1/4"-20



Naponski pragovi okidanja releja

Paralela	13.6V DC
Otvaranje 10 sec	12.35V DC
Otvaranje 30 sec	12.75V DC
Otvaranje visoki napon	16.0V
Podnaponska blokada	9.5V
Težina	0.43 kg

Mini Add-A-Battery Installation Diagram

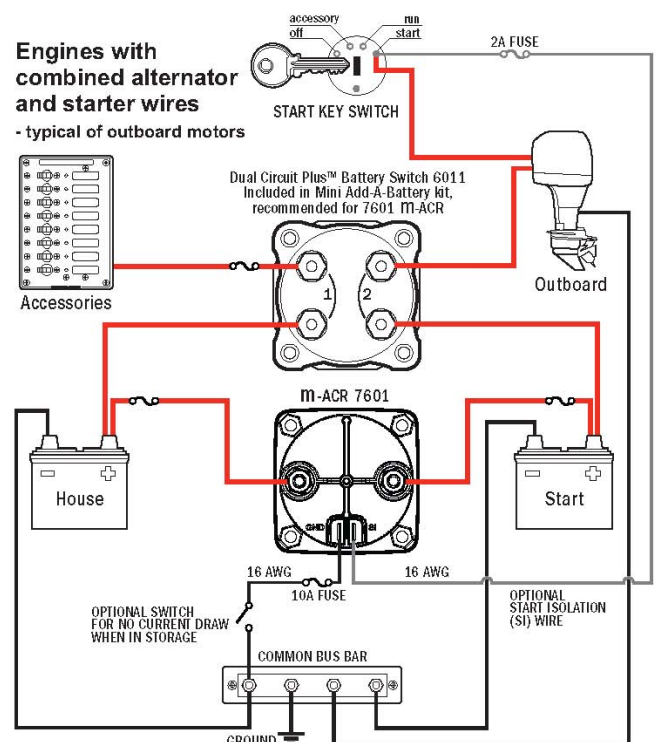

IME-Istra Marine Elektronika d.o.o.

Službeni predstavnik Blue sea systems za distribuciju i tehničku podršku., više na www.blueseasystems.com

